

The complete line of Ritchie watering fountains

Fresh water on demand, 24 hours a day

Thrifty King CT6 →



CT4-2000
16430

CT1-2000
16271

CT2-2000
16299

Includes Summer
Cover



WM1200
18053

WaterMaster



WM600
18171

WM90
16467

WM54
16542

WM Deep 54
18355

WM96
18007

NEW

Stall Fount



Stall Fount 125
heated
18082

Stall Fount
non-heated
16871

OmniFount



Omni 3
18270


Omni 1
18359

Omni 2
16619

Omni 5
16533

NEW

WaterMatic

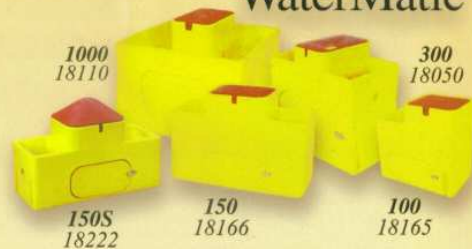

1000
18110

300
18050

150S
18222

150
18166

100
18165

A domed valve cover on the 150S keeps goats & sheep from standing and climbing on the fountain.

Pork King



PK1
16456


PK4
16459

PK2-1
16458

PK2
16457



Thrifty King for Swine



HG2
16259

HG4
16260

Cattle & Combination Fountains



3E
16743

5E
16745



3 Combination
16769

CattleMaster



CM480
18248

CM840
18235

CM1440
18252

Commander Series



Comm.1
16751

Comm.2
16758

2AC
Special
18043

IAC
18034

AC Series



2AC
18033

NEW

Immersion Heater

Patent #60/955,444
17863 (120V - 250 watt)
17940 (240V - 325 watt)
17939 euro plug (240V - 325 watt)

Self-Regulating Heat Cable

16276 (120V - 30 watt)
16713 (240V - 30 watt)



16612 - 4'
16417 - 2'
16416 - 2' Extension
18158 - 1'



Yard Hydrant

12502 - 2' Bury
12503 - 3' Bury
12504 - 4' Bury
12505 - 5' Bury
12506 - 6' Bury
12508 - 8' Bury
12510 - 10' Bury

All poly units available in green.



Specifications

Top quality materials • Smart design • Built to last

MODEL	PART #	LENGTH (in/cm)	WIDTH (in/cm)	OVERALL HEIGHT (in/cm)	DRINKING HEIGHT (in/cm)	SHIPPING WEIGHT (lbs/kg)	HEAT (CF=Constant Flow)	CAPACITY (gal/liter)	MAXIMUM ANIMAL CAPACITY
WaterMaster									
WM 1200	18053	144/366	24/61	28.5/72	24/61	250/113	CF Opt/Opt Imm & Self Reg Heat Cbl	60/227	500 beef, 250 dairy
WM 96	18007	96/244	33/84	28/71	22/56	200/91	CF Std/Opt Imm & Self Reg Heat Cbl	75/284	300 beef, 150 dairy
WM 90	16467	90/229	33/84	28/71	22/56	180/82	CF Std/Opt Imm & Self Reg Heat Cbl	30/114	300 beef, 150 dairy
WM 600	18171	72/183	24/61	28.5/72	24/61	140/64	CF Opt/Opt Imm & Self Reg Heat Cbl	28/106	250 beef, 125 dairy
WM 54	16542	54/137	33/84	28/71	22/56	125/57	CF Std/Opt Imm & Self Reg Heat Cbl	18/68	200 beef, 100 dairy
WM Deep 54	18355	54/137	33/84	28/71	22/56	125/57	CF Std/Opt Imm & Self Reg Heat Cbl	54/204	200 beef, 100 dairy
WaterMatic									
1000	18110	42/107	42/107	32/81	26/66	120/54	Opt Imm & Self Reg Heat Cbl	22/83	275 beef, 135 dairy
300	18050	36/91	21.5/55	31/79	26/66	69/31	Opt Imm & Self Reg Heat Cbl	8.2/31	125 beef, 60 dairy
150S	18222	33.5/85	14/36	22.5/57	13/33	39/18	Opt Imm & Self Reg Heat Cbl	4.2/16	100 sheep, 100 goats
150	18166	33.5/85	14/36	23.5/60	18/46	47/21	Opt Imm & Self Reg Heat Cbl	4.2/16	40 beef, 40 horses
100	18165	24.5/62	14/36	23.5/60	18/46	36/16	Opt Imm & Self Reg Heat Cbl	2.8/11	20 beef, 20 horses
Thrifty King									
CT6	16440	72.5/184	39/99	25/64	19/48	210/95	Opt Imm & Self Reg Heat Cbl	55/208	300 beef
CT4-2000	16430	42.8/109	35/89	25/64	19/48	152/69	Opt Imm & Self Reg Heat Cbl	45.5/172	200 beef
CT2-2000	16299	42.8/109	24/61	25/64	19/48	90/41	Opt Imm & Self Reg Heat Cbl	28/106	100 beef
CT1-2000	16271	28/71	20.3/51	25/64	19/48	53/24	Opt Imm & Self Reg Heat Cbl	11.2/42	30 beef
OmniFount									
Omni 5	16533	40/102	23.5/60	34.5/88	26/66	88/40	548W (4.6A@120V)	16/61	150 beef, 75 dairy
Omni 3	18270	31.5/80	22/56	34.5/88	26/66	75/34	548W (4.6A@120V)	10/38	100 beef, 50 dairy
Omni 2	16619	28.3/72	14.5/37	26/66	18/46	45/20	298W (2.5A@120V)	2.2/8	40 beef, 40 horses
Omni 1	18359	20/51	14.5/37	26/66	18/48	28/12.7	298W (2.5A@120V)	1.5/6	20 beef, 20 horses
CattleMaster									
CM 1440	18252	145.5/396.6	23.5/59.7	26/66	16/41	272/123	1298W (10.9A@120V)/CF	60/227	475 beef, 240 dairy
CM 840	18235	86/218.4	23.5/59.7	26/66	16/41	130/64	1048W (8.8A@120V)/CF	35/133	300 beef, 150 dairy
CM 480	18248	51/129.5	23.5/59.7	26/66	16/41	90/41	548W (4.6A@120V)/CF	20/76	200 beef, 100 dairy
Cattle Fountain									
5	16745	38.4/98	20.1/51	30/76	26/66	101/46	548W (4.6A@120V)/Opt Gas	16/61	150 beef, 75 dairy
3	16743	29.6/75	18/46	30/76	26/66	82/37	548W (4.6A@120V)/Opt Gas	10/38	100 beef, 50 dairy
Combination Fountain									
3 Combination	16769	29.6/75	18/46	30/76	26/66	100/45	798W (6.7A@120V)/Opt Gas	10/38	100 beef, 80 hogs
AC Series									
2AC	18033	25.9/66	11.4/29	21.5/55	17.8/45	38/17	298W (2.5A@120V)	2.2/8	40 beef, 80 calves
1AC	18034	17.6/45	11.4/29	21.5/55	17.8/45	28/13	298W (2.5A@120V)	1.5/6	20 beef, 40 calves
2AC Special	18043	25.9/66	11.4/29	14.5/37	10.8/27	30/14	298W (2.5A@120V)	2.2/8	40 beef, 80 calves
Commander Series									
Comm. 2	16758	32.7/83	17/43	16/41	16/41	68/31	298W (2.5A@120V)	6.5/25	60 beef
Comm. 1	16751	20.1/51	17/43	16/41	16/41	41/19	173W (1.4A@120V)	3.5/13	30 beef
Stall Fount									
Stall Fount 125	18082	14/36	13/33	Adjustable	Adjustable	31/14	173W (1.4A@120V)	1.9/7	single stall
Stall Fount	16871	14/36	13/33	Adjustable	Adjustable	13/6	NA	1.9/7	single stall
Shroud Set	18092	19.4/49 each (2 sections)	7/18	Up to 4'	Up to 4'	16/7	NA	NA	NA
Pork King									
PK 4	16459	31.5/80	23.3/59	12.5/32	7/18	63/29	548W (4.6A@120V)	3.5/13	160 hogs
PK 2-1	16458	23.2/59	23.3/59	12.5/32	7/18	50/23	298W (2.5A@120V)	2/8	80 hogs
PK 2	16457	31.5/80	13/33	12.5/32	7/18	42/19	298W (2.5A@120V)	2/8	80 hogs
PK 1	16456	23.2/59	13/33	12.5/32	7/18	30/14	298W (2.5A@120V)	1.2/5	40 hogs
Thrifty King for Swine									
HG 4	16260	31.3/80	31.3/80	16/41	8/20	70/32	Opt Immersion	5.2/20	160 hogs
HG 2	16259	31.3/80	20/51	16/41	8/20	50/23	Opt Immersion	2/8	80 hogs



Poly products warranty: 5 years full, followed by 5 years prorated. **Steel products warranty:** 10 years, 100% on stainless troughs against manufacturing defects and corrosion; 1 year full and 9 years prorated on casing and cover. No competitors offer a warranty this strong.